


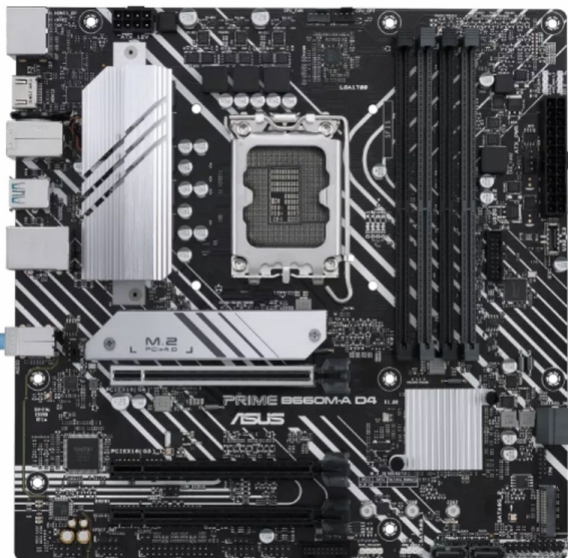

(slika je simbolična)

ASUS Prime B660M-A D4-CSM **LGA1700 DDR4 mATX osnovna plošča**

Kategorija: [Osnovne plošče](#)

Dobavljivost: **predvidena dobava 28.09.2026**

Šifra: **94317**

Cena: 104,62€ ~~107,52€~~

Kratek opis

Podrobno o izdelku:

Proizvajalčeva koda	90MB19K0-M1EAYC
EAN koda:	4711081508045
Proizvajalec:	ASUS
razprodaja	No
Podnožje:	LGA1700
Vezni nabor:	Intel B660M
Format:	Micro ATX
Pomnilnik:	4x DIMM, do 128 GB, DDR4 do 5333 MHz (OC) Intel 13. & 12. Gen Processors 1x PCIe 4.0/3.0 x16 slot
Razširitvena mesta:	Intel B660 Chipset 1x PCIe 3.0 x16 slot (supports x4 mode) 1x PCIe 3.0 x16 slot (supports x1 mode)
SATA/IDE:	4x SATA 6Gb/s port

Shranjevanje:	Podpira 2x M.2 slots in 4x SATA 6Gb/s port Intel 13. & 12. Gen Processors* M.2_1 slot (Key M), tip 2242/2260/2280 - Intel 12th Gen procesor podpira PCIe 4.0 x4 mode. Intel B660 Chipset** M.2_2 slot (Key M), tip 2242/2260/2280 (podpira PCIe 4.0 x4 mode)* 4x SATA 6Gb/s ports * Intel Rapid Storage Technology supports SATA RAID 0/1/5/10. ** Intel Rapid Storage Technology supports Intel® Optane Memory H Series on PCH attached M.2 slots.
Zvočna kartica:	Realtek 7.1 Surround Sound High Defenition Audio CODEC Zadaj USB: Skupno 6 vhodov 2x USB 3.2 Gen 2 ports (2x Type-A) 4x USB 2.0 ports (4x Type-A)
Število USB priključkov:	Spredaj USB: Skupno 10 ports 2x USB 3.2 Gen 1 headers podpira dodatne 4 USB 3.2 Gen 1 ports 1x USB 3.2 Gen 1 connector (podpira USB Type-C) 2x USB 2.0 headers podpira dodatne 4 USB 2.0 ports 1x USB 2.0 header podpira 1 USB 2.0 port
Mrežna kartica:	1x Intel 1Gb Ethernet, ASUS LANGuard 2x USB 3.2 Gen 2 ports (2x Type-A) 4x USB 2.0 ports (4x Type-A) 1x DisplayPort
Zunanji konektorji:	2x HDMI ports 1x Intel 1Gb Ethernet port 3x Audio jacks 1x PS/2 Tipkovnica/Miška combo port Ventilator in hlajenje 1x 4-pin CPU Fan 1x 4-pin CPU OPT Fan 2x 4-pin Chassis Fan Napajanje 1x 24-pin glavno napajanje 1x 8-pin +12V napajanje Shranjevanje 2x M.2 slots (Key M) 4x SATA 6Gb/s ports USB 2x USB 3.2 Gen 1 headers support additional 4 USB 3.2 Gen 1 ports 1x USB 3.2 Gen 1 connector (supports USB Type-C®) 2x USB 2.0 headers support additional 4 USB 2.0 ports 1x USB 2.0 header supports 1 USB 2.0 port Drugo 3x AURA Addressable Gen 2 headers 1x AURA RGB header 1x Clear CMOS header 1x COM Port header 1x Front Panel Audio header (AAFP) 1x LPT header 1x S/PDIF Out header 1x SPI TPM header (14-1pin) 1x 20-3 pin System Panel header with Chassis intrude function
Notranji konektorji:	
Garancija	36 mesecev

Tehnične Specifikacije

Najvišja kapaciteta pomnilnika (GB): 128

Primerno za procesorje: Intel

Format ohišja: MicroATX